


25 MW AI Data Center

Stage 1: 12 MW | Stage 2: 15 MW | Expansion envelope: 25 MW facility input
Assignment baseline: 20 MW IT at PUE 1.25

CONCEPTUAL SITE PLAN - NOT TO SCALE

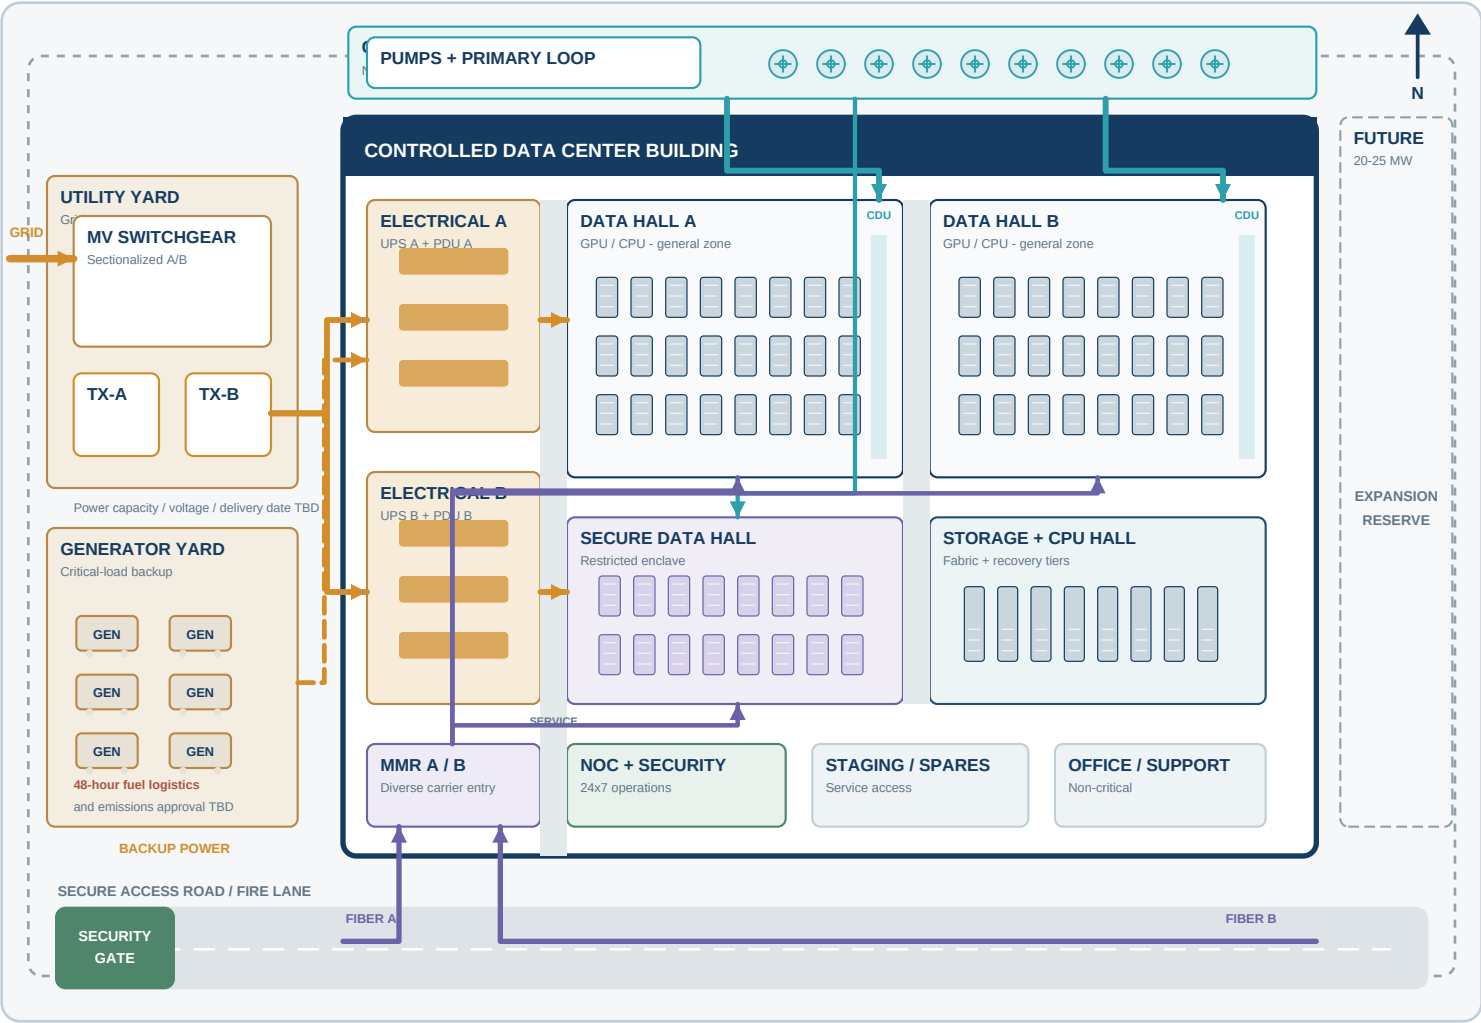

SYSTEM LEGEND

- Power A/B + backup
- Cooling supply / return
- Fiber + data fabric
- Operations / security
- Future expansion

CAPACITY CONCEPT

- 12 MW** 2030 first module
- 15 MW** 2033 conditional step
- 25 MW** Uncommitted envelope
- PUE 1.20** Target, not engineered

ENGINEERING GATES

- Peak IT + cooling load sheet
- One-line and protection study
- Post-fault A/B capacity
- UPS minutes + generator kW
- 48-hour fuel and cooling duty
- Rack density + liquid/air mix
- Fiber route diversity
- Storage throughput + recovery

FAILURE PATHS AND OPERATING RESPONSE

1 Largest electrical component fails

Isolate the failed transformer or switchgear section. UPS bridges transfer; surviving A/B capacity protects storage, security and necessary inference. Pause batch work if required.

2 Grid unavailable for 48 hours

Generators and cooling controls serve the defined critical load. Fuel logistics, emissions, pumps and heat rejection must be proven; full-load operation is not assumed.

3 Capacity cannot carry all GPU work

Checkpoint and shed interruptible jobs first. Move only eligible work to approved external capacity; restricted data remains in its authorized environment.